


◆ SPECIFICATIONS


PPF:	> 900 $\mu\text{mol/s}$
Efficacy:	> 2.6 $\mu\text{mol/J}$
Input Power:	Max 350W (Full Spectrum) / 10W (Far Red)
Power Factor:	$\geq 90\%$
Fixture Dimensions/Weight:	45"L x 44.6" W x 4.44" H / 23.62 lbs
Mounting Height:	> 6" (15.2cm) Above Canopy
Lifetime:	L90 : > 54,000 hrs
Warranty:	5 Years Standard Warranty
Input Voltage:	Autosensing 100-277 V
Amp Draw:	120V/3.63A, 240V/1.34A, 277V/1.2A
Group Control:	YES

◆ DIMENSIONS

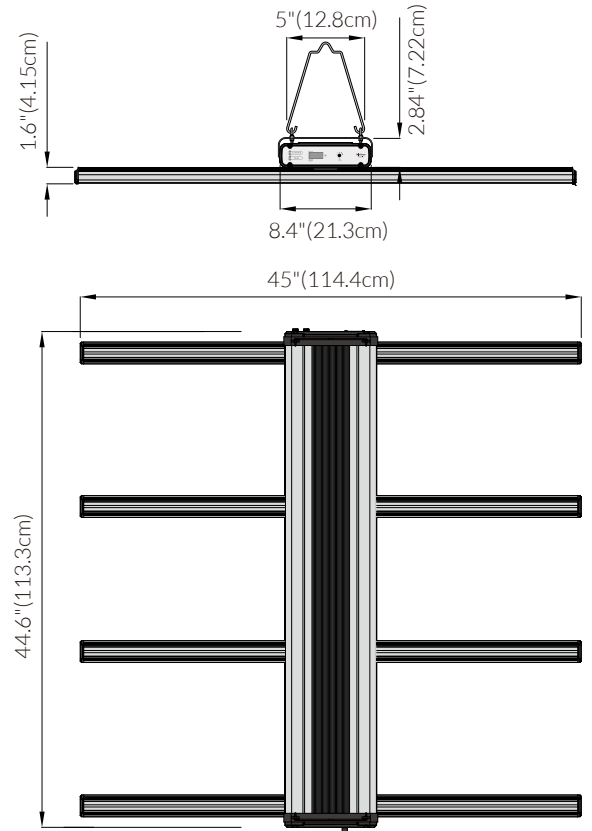

◆ MODEL-W (Tested at 6" / Tested at 12")

Average PPFD 514/ 461

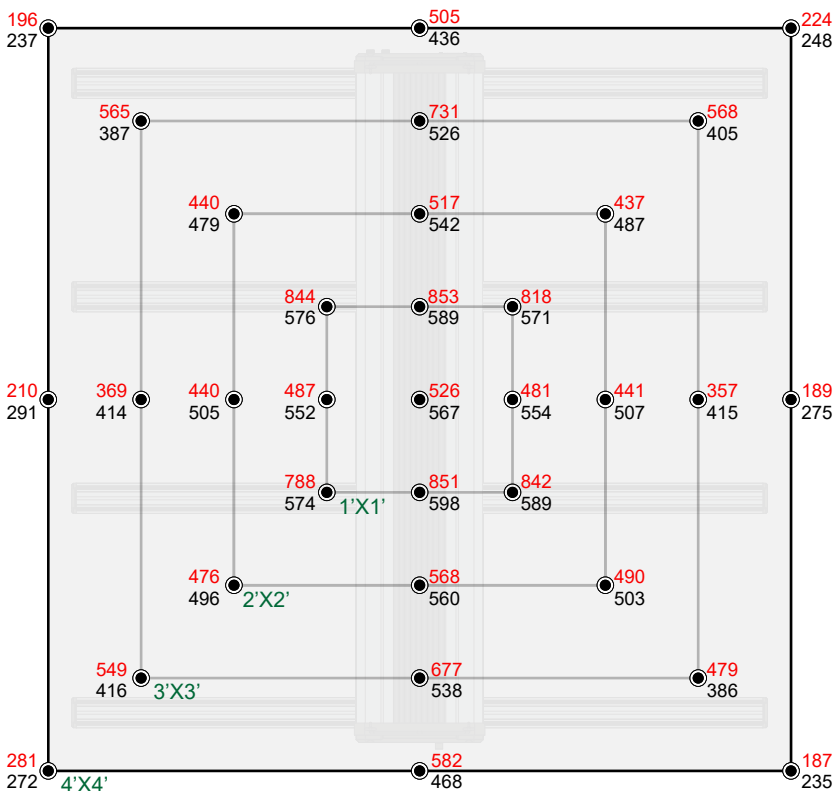

◆ FEATURES

- OUTSTANDING EFFICIENCY
- PLUG AND PLAY
- ON-BOARD DIMMING
- FULL SPECTRUM DESIGN
- INDEPENDENT FAR RED CHANNEL
- EXTERNAL CONTROLLABILITY
- GROUP CONTROL

◆ SPECTRUM

